


LTH-830 SERIES

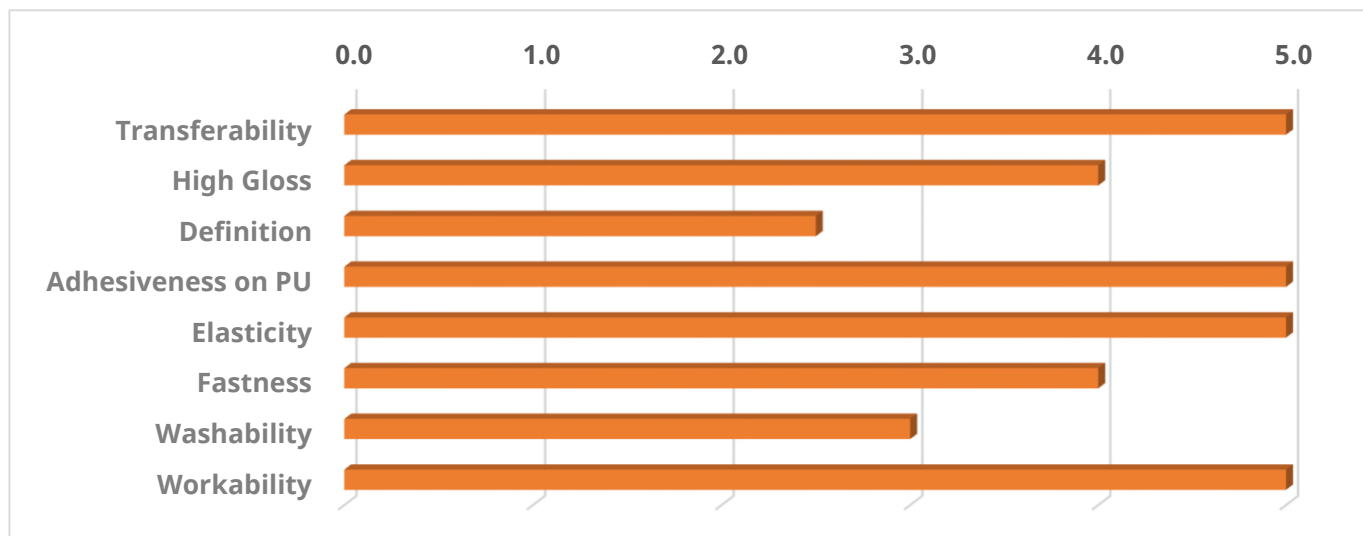

Principal Characteristics

- Good durability
- Excellent flexibility
- Excellent adhesiveness
- Excellent workability

Fields of Application

- Clothing
- Fabrics
- Wallet, belt, shoes and leather products
- Various substrates in textile industry

Product Type

- LTH-830A: Improved transferability type
- LTH-830F: Improved flexibility type

Suitable Substrates

- Various leather
- Various textile (with PU adhesive)

Specification

- Carrier film thickness: 12 μm ~ 25 μm
- Packaging: Customized specifications

Operating Condition

- Up and down presses temperatures: 150 ~ 190 °C
- Cylinder presses temperatures: 110 ~ 150 °C
- 80 °C × 24hrs aging (after transfer on PU)

Health and Safety

- MSDS of the product is available on request.