


## LTH-83x 시리즈

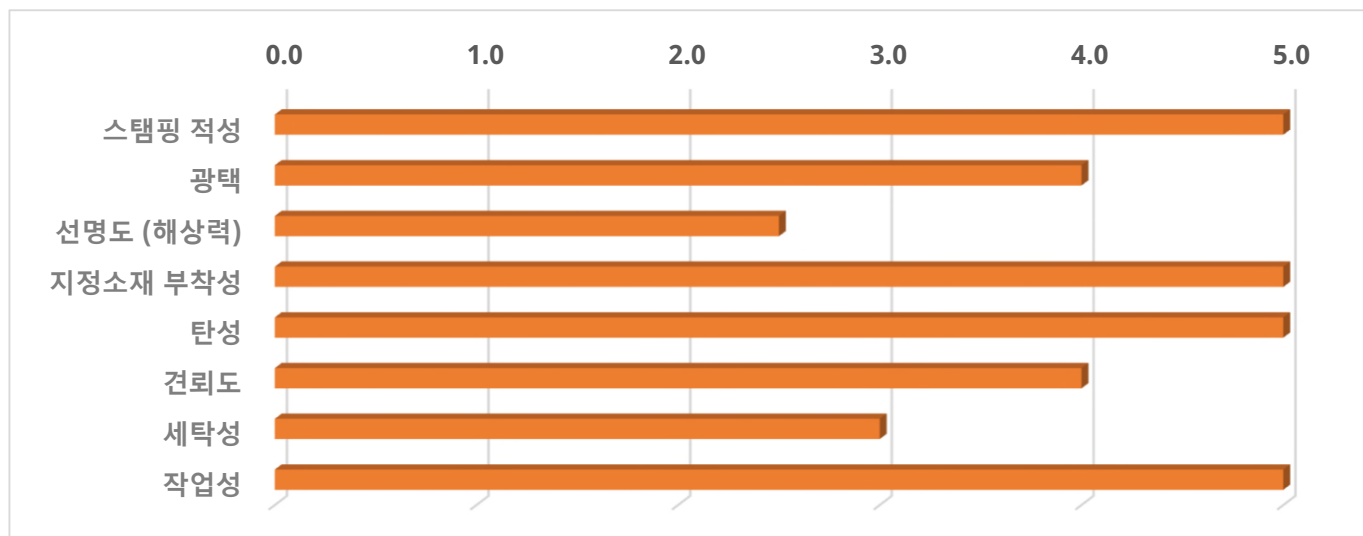

### Principal Characteristics

- Good durability
- Excellent flexibility
- Excellent adhesiveness
- Excellent workability

### Fields of Application

- Clothing
- Fabrics
- Wallet, belt, shoes and leather products
- Various substrates in textile industry

### Product Type

- LTH-830A: 전사성 개선타입
- LTH-830F: 유연성 개선타입

### Suitable Substrates

- Various leather
- Various textile (with PU adhesive)

### Specification

- Carrier film thickness: 12  $\mu\text{m}$  ~ 25  $\mu\text{m}$
- Packaging: Customized specifications

### Operating Condition

- Up and down presses temperatures: 150 ~ 190 °C
- Cylinder presses temperatures: 110 ~ 150 °C
- 80 °C × 24hrs aging (after transfer on PU)

### Health and Safety

- MSDS of the product is available on request.