


## LTH-85x 시리즈

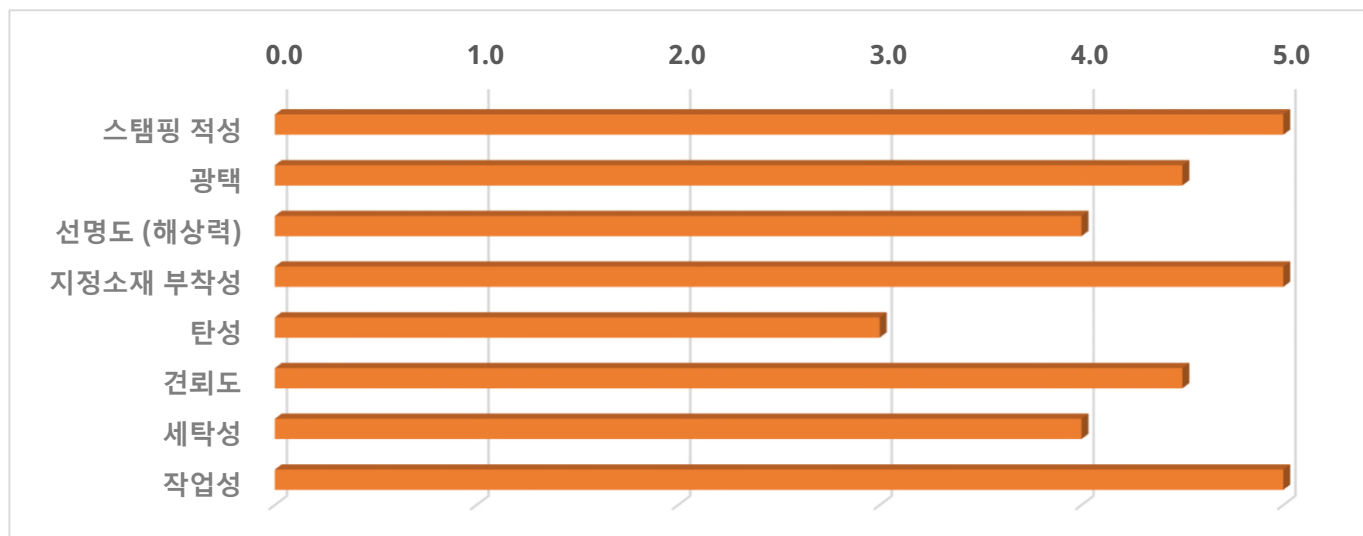

### Principal Characteristics

- Excellent durability
- Excellent adhesiveness
- Washing fastness
- Excellent workability

### Fields of Application

- Clothing
- Fabrics
- Wallet, belt, shoes and leather products
- Various substrates in textile industry

### Product Type

- LTH-850Q: 내구성 개선타입
- LTH-850W: 견뢰도 개선타입

### Suitable Substrates

- Various leather
- Various textile (with PU adhesive)

### Specification

- Carrier film thickness: 12  $\mu\text{m}$  ~ 25  $\mu\text{m}$
- Packaging: Customized specifications

### Operating Condition

- Up and down presses temperatures: 150 ~ 190  $^{\circ}\text{C}$
- Cylinder presses temperatures: 110 ~ 150  $^{\circ}\text{C}$
- 80  $^{\circ}\text{C}$  × 24hrs aging (after transfer on PU)

### Health and Safety

- MSDS of the product is available on request.