


## MPH-95x 시리즈

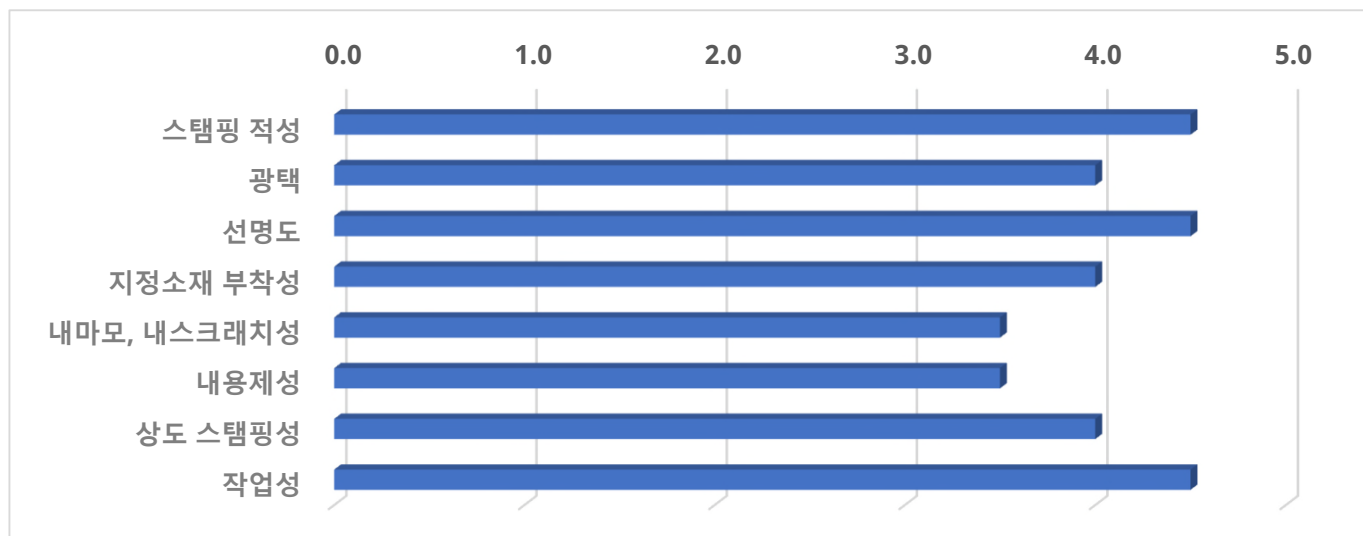

### Principal Characteristics

- Easy release
- High gloss
- Fine definition
- Good durability
- Processable with silicon or metal dies

### Product Type

- MPH-950L
- MPH-950H
- MPH-950P

### Metal Die Stamping Temperatures

- Up and down presses : 150 ~ 210 °C
- Peripheral roll-on : 170 ~ 230 °C

### Specification

- Carrier film thickness : 12  $\mu\text{m}$  ~ 15  $\mu\text{m}$
- Packaging : 640mm × 240m × 5rolls in a box  
640mm × 120m × 10rolls in a box

### Fields of Application

- PVC folders and book covers
- Cosmetics and pharmaceuticals containers
- Various plastic containers and caps
- Ballpoint pens and stationery
- OPP laminated paper

### Suitable Plastics

- PVC, ABS, PS, SAN substrates
- PC, PP, PET, Acrylic substrates
- PE and various plastics

### Silicon Rubber Die Stamping Temperatures

- Up and down presses : 170 ~ 210 °C
- Peripheral roll-on : 180 ~ 250 °C

### Health and Safety

- MSDS of the product is available on request.