


MPH-96x 시리즈

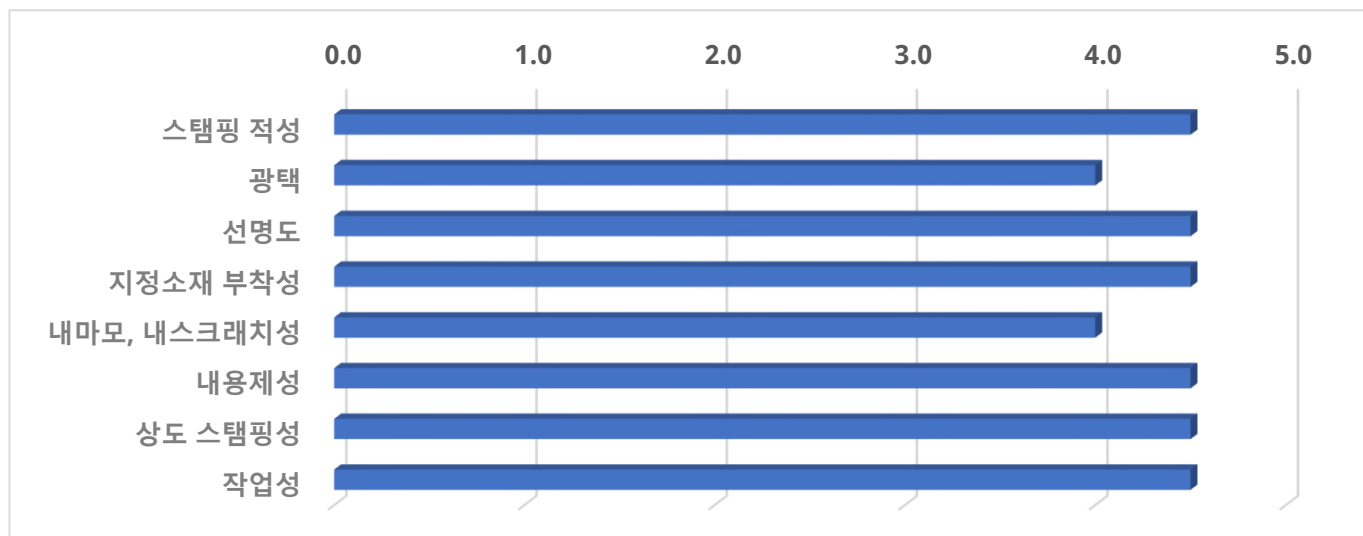

Principal Characteristics

- Easy release
- High gloss
- Fine definition
- Good durability
- Processable with silicon or metal dies

Product Type

- MPH-960E
- MPH-960T

Metal Die Stamping Temperatures

- Up and down presses : 130 ~ 210 °C
- Peripheral roll-on : 150 ~ 230 °C

Specification

- Carrier film thickness : 12 μm ~ 15 μm
- Packaging : 640mm × 240m × 5rolls in a box
640mm × 120m × 10rolls in a box

Fields of Application

- Coated PE tube
- Uncoated PE tube
- HDPE, LDPE containers
- Cosmetics and pharmaceuticals containers

Suitable Plastics

- Coated and uncoated PE substrates
- Various plastics

Silicon Rubber Die Stamping Temperatures

- Up and down presses : 150 ~ 210 °C
- Peripheral roll-on : 160 ~ 250 °C

Health and Safety

- MSDS of the product is available on request.