


MPH-97x 시리즈

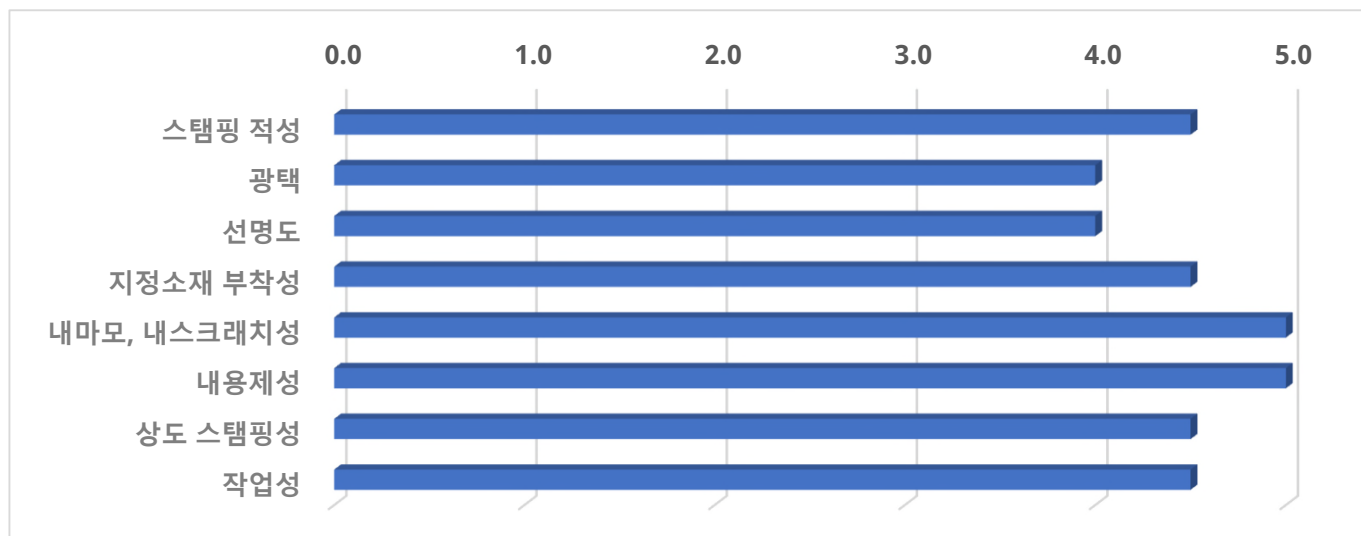

Principal Characteristics

- Excellent durability
- Excellent adhesiveness
- Scratch resistance
- Processable with silicon or metal dies

Product Type

- MPH-970A
- MPH-970P
- MPH-970E

Metal Die Stamping Temperatures

- Up and down presses : 150 ~ 210 °C
- Peripheral roll-on : 170 ~ 230 °C

Specification

- Carrier film thickness : 12 μ m ~ 25 μ m
- Packaging : 640mm × 240m × 5rolls in a box
640mm × 120m × 10rolls in a box

Fields of Application

- Cosmetics and pharmaceuticals containers
- Alcohol and beverage bottle
- Various plastic containers and caps
- Customized substrates

Suitable Plastics

- PVC, ABS, PS, SAN substrates
- PP, PET and Acrylic substrates
- PE and various plastics

Silicon Rubber Die Stamping Temperatures

- Up and down presses : 170 ~ 210 °C
- Peripheral roll-on : 180 ~ 250 °C

Health and Safety

- MSDS of the product is available on request.